
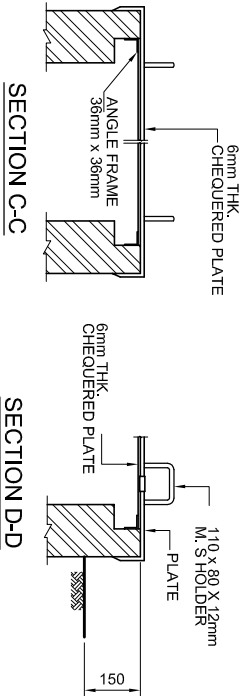
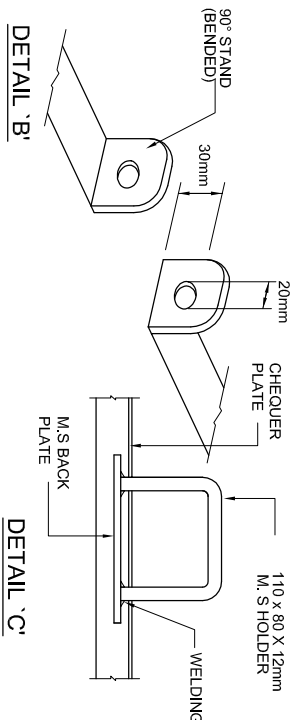


T-POT STRAINER	
SIZE	LENGTH = a
100mm	340mm
150mm	420mm
200mm	480mm

FLOWMETER			
SIZE	LENGTH = b	5d	3b
100mm	250mm	500mm	300mm
150mm	300mm	750mm	450mm
200mm	350mm	1000mm	600mm

PRESSURE REDUCING VALVE	
SIZE	LENGTH = c
100mm	368mm
150mm	473mm
200mm	560mm

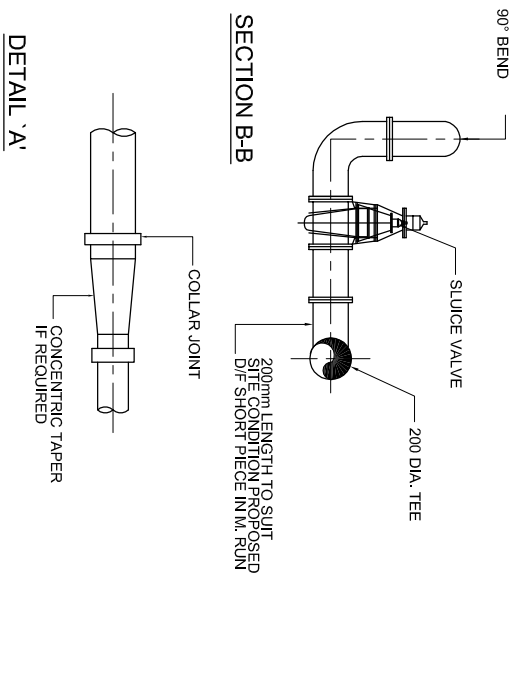

- NOTES :-**
1. ALL DIMENSIONS ARE IN MILLIMETRE UNLESS OTHERWISE STATED.
 2. THRUST BLOCK TO BE CAST AGAINST UNDISTURBED GROUND.
 3. FOR ALL STEEL PIPES, NO ALLOWANCE FOR INTERNAL LINING CUTBACK TO BE PROVIDED
 4. ALL EXPOSED STEEL TO BE PAINTED WITH 2 PACK HIGH SOLIDS EPOXY PAINT TO MIN. 150mm.
 5. THE DIMENSIONS ARE BASED ON 'WATTS' PRV, N/M FLOWMETER, LYE T-POT STRAINER.



SURBUANJAYA PERKHIDMATAN AIR NEGARA
 No. 6, JALAN SIA/223,
 46100 PETALING JAYA,
 SELANGOR DARUL EHSAN, MALAYSIA.
 Tel: 03-75975172 / 75941373
 Fax: 03-75975173

PREPARED BY :
MINCONSULT SDN. BHD.
 No. 6, JALAN SIA/223,
 46100 PETALING JAYA,
 SELANGOR DARUL EHSAN, MALAYSIA.
 Tel: 03-75975172 / 75941373
 Fax: 03-75975173

DRAWING TITLE:

DETAILS OF DISTRICT FLOW METER CHAMBER

DRAWING NO: SPANWWS/STD/F/009